



Telephone:
Fax:
VAT Registration No.:

Dimensions				
Notes			Specified value	Measured value
	Wheelbase	mm	2200	
	Track - front/rear	mm	1430/1400	
Tightening torques				
Notes			Specified value	Measured value
	Tightening torque - steel wheels		88-91 Nm	
	Tightening torque - alloy wheels		88-91 Nm	
Checking range - Front wheels				
Notes			Specified value	Measured value
	Load positioning		N	
	Toe-in (N = negative, toe-out)	mm	2 - 4	
	Toe-in	deg	0°15' - 0°30'	
	Toe-in	deg-1/100	0,25 - 0,50	
	Camber	deg	0°10' - 0°50'	
	Camber	deg-1/100	0,17 - 0,83	
	Castor	deg	3° - 4°	
	Castor	deg-1/100	3 - 4	
Setting data - Four wheels				
Notes			Specified value	Measured value
	Load positioning		N	
	Toe-in (N = negative, toe-out)	mm	3±1	
	Toe-in	deg	0°22'±8'	
	Toe-in	deg-1/100	0,37±0,13	
	Camber	deg	0°30'±20'	
	Camber	deg-1/100	0,50±0,33	
	Camber adjustment		Adjustable	
	Castor	deg	3°30'±30'	
	Castor	deg-1/100	3,50±0,50	
	Castor adjustment		Adjustable	
	KPI (SAI)	deg	11°30'	
	KPI (SAI)	deg-1/100	11,50	
	Included angle	deg	12°	
	Included angle	deg-1/100	12	


Load positioning (kg)

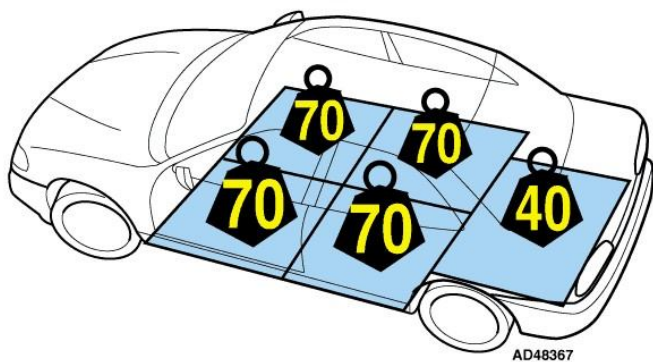

Load positioning (kg)

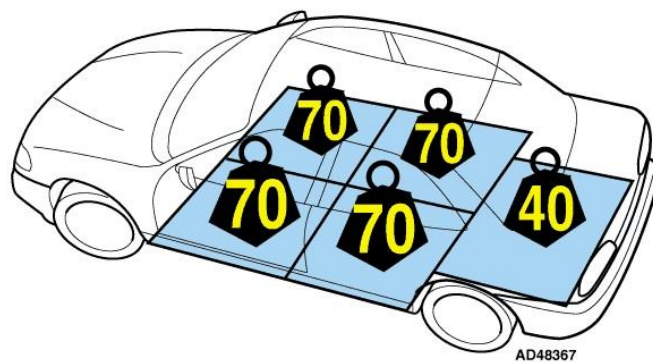

Camber adjustment

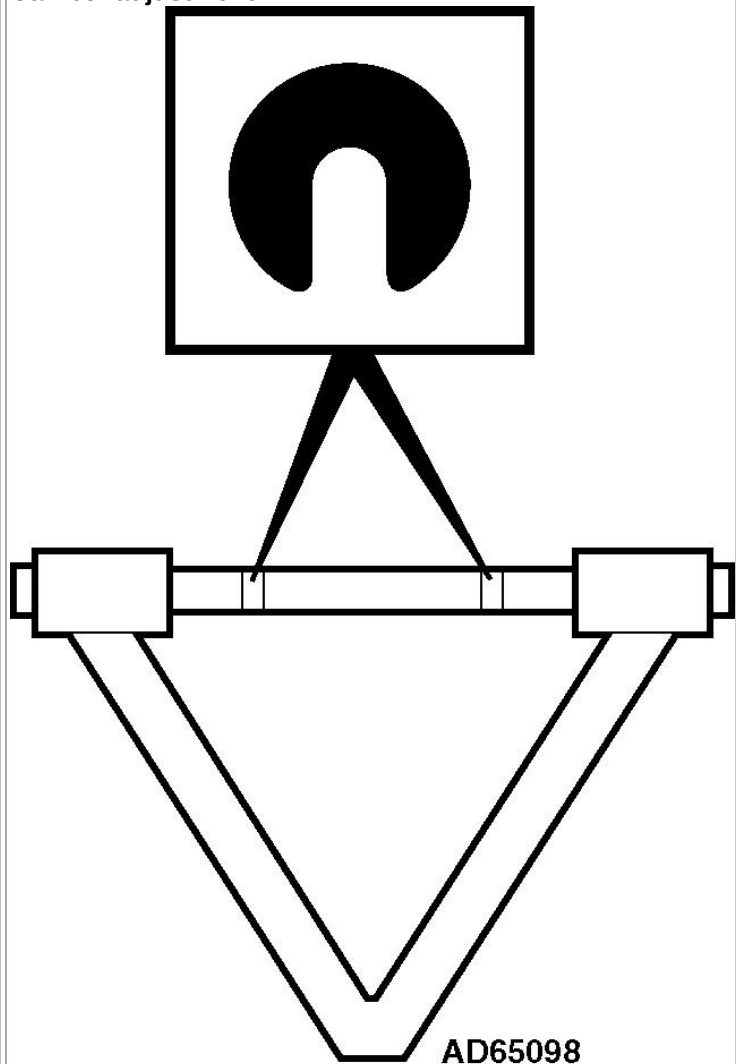

Castor adjustment

